

STI FIRE SERIES STOPPER® STATION



SS-2002F



KEY FEATURES

General Information

- Push button switches designed specifically to complement fire alarms systems of the 21st century.
- Simple Push-to-Activate and Key-to-Reset operation.
- Three year guarantee against breakage of polycarbonate in normal use (one year on electro mechanical and electronic components).

Design

- Patented design helps stop accidental activation.
- Raised letters and symbols molded into housing.

Construction

- Super tough housing.
- ADA Compliant and UL Listed to U.S. and Canadian safety standards for outdoor and indoor use.
- Stainless steel backplate with ground lug.

Installation

- Polycarbonate complies with FDA regulations for food contact applications.
- Typical working properties of polycarbonate are -40° to 250°F (-40° to 121°C).
- When using an STI Stopper Station outdoors, UL requires unit to be protected with an STI UL Listed Weather Stopper®.

Electronics

- Two Form "C" contacts rated 125/250 VAC, 10A, 1/2 HP, 30 VDC, 6A.

Options

- Add a tough STI cover to protect against vandalism, accidental damage or weather.
- Cover available for indoor use, with a built-in alarm to help stop malicious activation.

PRODUCT OVERVIEW

This STI Stopper Station with a patented design is a highly advanced push button unit that is ADA Compliant and UL Listed to U.S. and Canadian safety standards. Model SS-2002F is designed specifically to complement fire alarm systems of the 21st century. Operation includes Push-to-Activate and Key-to-Reset. The unit incorporates quality features throughout, including raised lettering molded into its polycarbonate housing.

If you wish, you can protect your fire Stopper Station with a tough STI cover to help stop vandalism or accidental damage. The Universal Stopper® cover can be ordered with an optional pre-alarm to help stop malicious activation for inside applications. Outside applications require an STI UL Listed outdoor rated cover to be mounted over the Stopper Station button to maintain UL Approval.



STI Fire Series Stopper® Station

Dimensions and Technical Information

MODELS AVAILABLE

SS-2002F	Red button Push-to-Activate Key-to-Reset
SS-2022F	Button and Shield
SS-20A2F	Button and Shield with sound
SS-2032F	Button and Universal Stopper Cover with no horn - flush mount
SS-2042F	Button and Universal Stopper Cover with horn - flush mount
SS-2072F	Button and Universal Stopper Cover without horn with spacer
SS-2082F	Button and Universal Stopper Cover with horn with spacer

NOTE: For complete cover information, see spec sheet on the specific cover

Accessories

KIT-H18061	One extra key for SS-2002F model
KIT-71100A-R	Back Box - red for SS-2002F (included)

APPROVALS & WARRANTY

TESTING

It has been tested and approved or listed by:


- Underwriter Laboratories File No. S2466
- Canadian Underwriter Laboratories Issue File No. S2466
- California State Fire Marshal approval 7150-1416:102
- ADA Compliant

NOTE

Please note that it is mandated by UL that your STI Stopper Station be protected with an STI UL Listed outdoor rated cover when used outside.

WARRANTY

Three year guarantee against breakage of polycarbonate in normal use (one year on electro mechanical and electronic components).

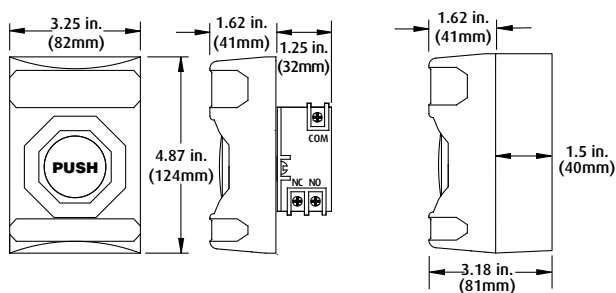

SS-2002F



**Safety Technology
International**

2306 Airport Road
Waterford, Michigan
48327, USA

Tel: 248-673-9898
Fax: 248-673-1246
Toll-free: 800-888-4784
info@sti-usa.com
www.sti-usa.com

Taylor House
34 Sherwood Road
Bromsgrove, Worcestershire
B60 3DR, England

Tel: +44 (0)1527 520 999
Fax: +44 (0)1527 501 999
info@sti-emea.com
www.sti-emea.com